



Det här verket har digitaliserats vid Göteborgs universitetsbibliotek och är fritt att använda. Alla tryckta texter är OCR-tolkade till maskinläsbar text. Det betyder att du kan söka och kopiera texten från dokumentet. Vissa äldre dokument med dåligt tryck kan vara svåra att OCR-tolka korrekt vilket medför att den OCR-tolkade texten kan innehålla fel och därför bör man visuellt jämföra med verkets bilder för att avgöra vad som är riktigt.


This work has been digitized at Gothenburg University Library and is free to use. All printed texts have been OCR-processed and converted to machine readable text. This means that you can search and copy text from the document. Some early printed books are hard to OCR-process correctly and the text may contain errors, so one should always visually compare it with the images to determine what is correct.



Ödsmål, Kville sn, Bohuslän

Hällristning
Fiskare från
bronsåldern

Rock carving
Bronze age
fishermen

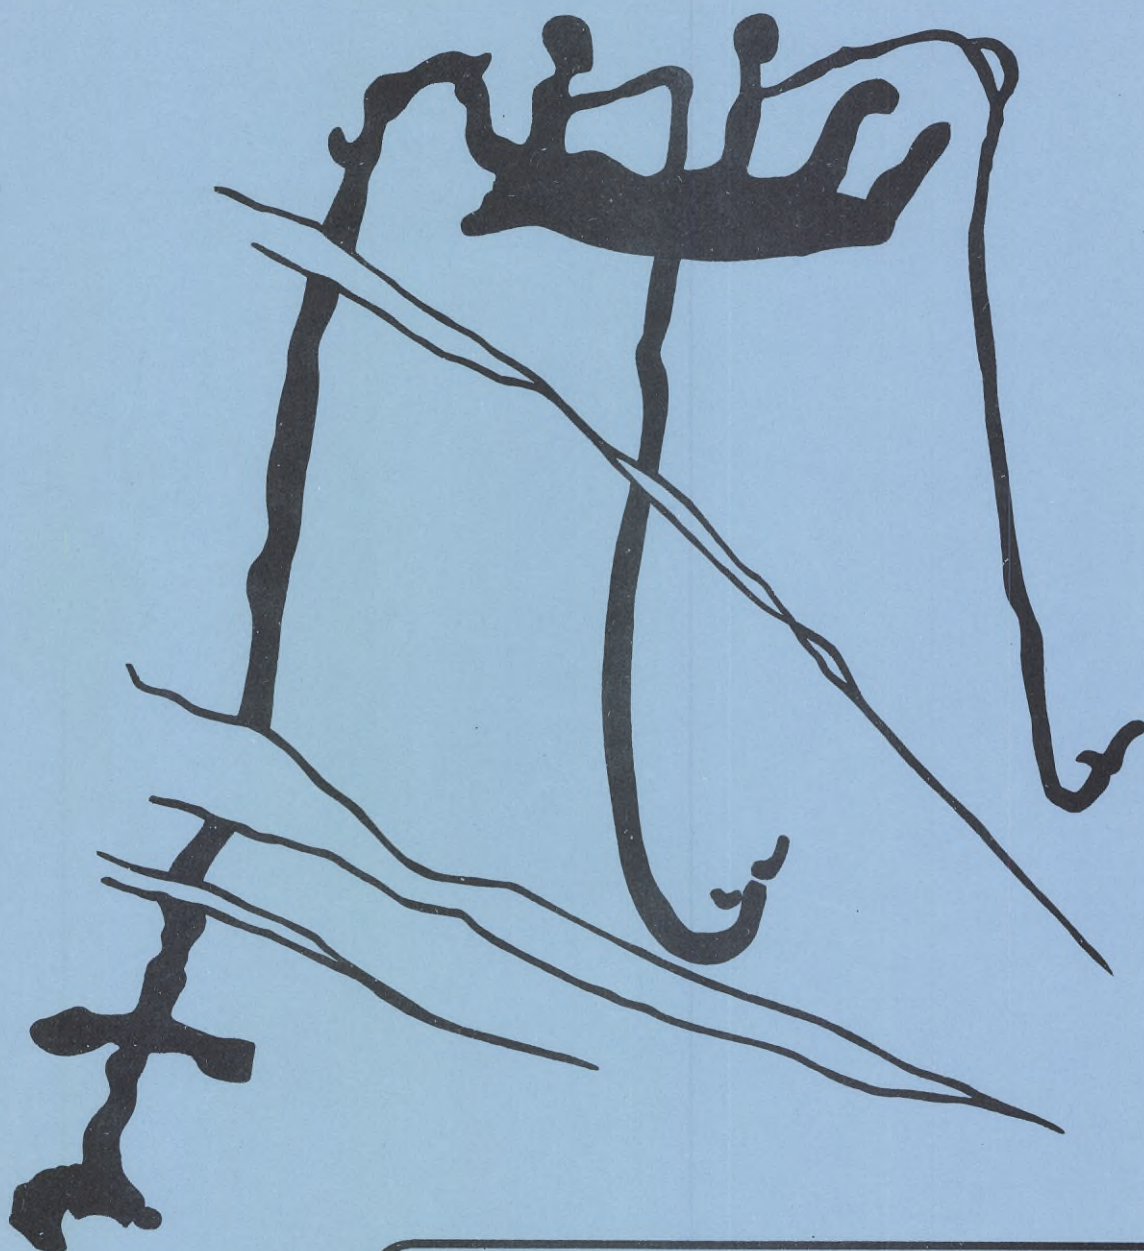

MEDDELANDE från
HAVSFISKELABORATORIET · LYSEKIL

nr
272

Target strength measurements and C-value de-
terminations of live Skagerrak herring and cod

by

Asgeir Aglen, Olle Hagström and Nils Håkansson

May 1981

TARGET STRENGTH MEASUREMENTS AND C-VALUE DETERMINATIONS
OF LIVE SKAGERRAK HERRING AND COD

by

ASGEIR AGLÉN, INSTITUTE OF MARINE RESEARCH, BERGEN, NORWAY
OLLE HAGSTRÖM, INSTITUTE OF MARINE RESEARCH, LYSEKIL, SWEDEN
NILS HÅKANSSON, ICHTHYOKONSULT HB, LYSEKIL, SWEDEN

INTRODUCTION

To establish the conversion factor C in the equation

$$D = C \times M + b \quad (1)$$

where

D = Fish density in weight per unit area

C = Conversion factor

M = Integrator output per nautical mile (NM)

b = correction factor

measurements on caged live herring and cod were performed. The experiments were initiated by the radical change in performance data of the equipment of the Swedish R/V "Argos" (Simrad 120 kHz echo sounder EK 120 S and Simrad QM MK II). The hull mounted transducer (ceramic, 120 kHz, 10°, ITC) was also replaced 1980-09-05. The change in important performance data is shown in table 1. Since no calibration was made in connection with the determinations of C in 1978 (Hagström et al, 1979; Håkansson et al, 1979) these values of C no longer have any significance.

The value of C is a function of fish target strength, calibration constants, settings of the equipment and hydrographic factors such as sound velocity and attenuation in water:

$$10 \lg C = -\overline{TS}_{kg} - 10 \lg \Psi - (SL + VR) + (20 \lg R_o + 2 \times R_o) - 10 \lg \frac{C_T}{2} + V_o - A \quad (2)$$

where

\overline{TS}_{kg} = mean target strength per kilogram of fish

$10 \lg \Psi$ = correction term for the beam pattern of the transducer in use (Ψ = equivalent transducer beam width)

SL = Source level (dB// 1 μ bar ref. 1 m)

VR = Receiving voltage response (dB// IV per μ bar)

R_0	= Maximum TVG-range (m)
α	= Absorption coefficient (dB/m)
c	= Sound velocity (m/s)
T	= Pulse duration (sec)
V_0	= The average value of the input signals to the integrator that gives 1 mm integrator deflection at 0dB gain in a 1 m interval (dB/IV)
A	= Echo integrator gain setting

Using the calibration data from 1980-09-05 the equation can be expressed as

$$10 \lg C = - \overline{TS}_{kg} - 48.8 - A$$

There are several methods of measuring target strength (Goddard and Welsby, 1977; Johannesson and Losse, 1977; Nakken and Olsen, 1977; Hagström et al, 1979). The method used in our experiments resembles those used by Johannesson and Losse (1977) and Edwards (1975) and has been adopted to the conditions on R/V "Argos".

MATERIALS AND METHODS

The live fish was placed in a cylindric cage of 3.0 m in diameter and 3.0 m of depth. The two frames were made of massive 13 mm ϕ steel and the netting of 21 mm mesh knotted 0.17 mm monofilament nylon (fig. 1).

The cage was placed at such a distance from the transducer that the frames and the netting should give minimum background values according to the transducer beam pattern, i.e. the upper frame of the cage was 4 m from the transducer. A diver helped to centrare the cage and made observations of the fish during the experiments. Under these circumstances the main lobe of the transducer was almost entirely within the cage (fig. 2).

In the first experiment 17 cods were placed in the cage. However, the cod refused to cooperate and gathered itself peripheral at the upper frame of the cage. In experiment No. 2, 15 cod was in the experimental cage (mean weight = 0.709 kg). During the first part of this experiment the cod seemed to distribute itself not uniformly, but during the last 7.5 hours the fish, as observed on the oscilloscope, appeared to have a more random vertical distribution. These latter values were used for target strength estimate. At the end of

the experiment two cods had escaped from the cage so a mean of 14 cods was used for the calculations. All measurements on cod were performed with the cage included.

In experiment No. 3 one hundred herrings were placed in the cage. The herring had a mean length of 23.7 cm and a mean weight of 0.112 kg. The vertical distribution seemed to be random according to oscilloscope observations. At the end of the experiment 11 herrings had died so a mean of 95 herrings was used for the calculations for channel B, which covered an interval of 1 m within the cage and 100 herrings for channel A, which covered the whole cage. The herring was integrated over 4.5 hours. One experiment on herring failed due to bad weather. As reference and for calibration a table tennis ball (Stiga) was used. The ball was attached to 0.5 mm monofilament nylon cord by Araldite. The nylon cord was fixed in the middle of a 4 m long rod so that the table tennis ball was two meters over this rod. The table tennis ball was placed in the acoustic axis at 5.7 m distance from the transducer. The settings of the equipment during the fish experiments are shown in table 2 and of the table tennis ball calibrations in table 3.

RESULTS

At the setting 20 lgR+0dB 1/1 effect the target strength of the table tennis ball was determined to -42.2 dB, when SL + VR = 117.3 dB was assumed. The conditions were stable with less than 10 % variation in U_p (peak voltage) from ping to ping. Table 3 shows the sum (SL + VR) at various settings if one assume a target strength of -42 dB of the table tennis ball.

The background values of the empty cage when integrated completely were determined to 7.1 mm integrator deflection S.D. 1.1 on channel A and 8.2 mm, S.D. 1.1 on channel B, both values referred to the settings: 20 lgR+0dB, 1/10 effect, Integrator gain 0dB x 10, thresh. = 0.

The experiments on cod gave a result of

Channel A: $\overline{TS}_{kg} = -36.9$ dB C = 2.24 tonnes/NM² and mm/NM

Channel B: $\overline{TS}_{kg} = -36.5$ dB C = 2.07 tonnes/NM² and mm/NM

The mean length of the cod was 41.25 cm. The variation in integrator deflection per NM for cod is shown in fig. 3.

The average of channel A and B gives

$$\overline{TS}_{kg} = -10 \log L - 20.6 \text{ dB and}$$

$C = 0.052 \times L$ tonnes/ NM^2 and mm/ NM (L is fish length in cm) backscattering cross-section per unit weight is assumed to be inversely proportional to fish length.

In experiment No. 3 on herring, channel B integrated a one meter interval in the middle of the cage and channel A integrated an interval covering the whole cage. The contribution from the cage in channel B could be neglected. The variation in integrator deflection per NM is shown in Fig. 4. The experiment on herring gave a result of

Channel A: $\overline{TS}_{kg} = -38.7$ dB, $C = 3.35$ tonnes/ NM^2 and mm/ NM

Channel B: $\overline{TS}_{kg} = -38.3$ dB, $C = 3.04$ tonnes/ NM^2 and mm/ NM

The mean length of the herring was 23.7 cm.

The average of channel A and B gives

$$\overline{TS}_{kg} = -10 \log L - 24.8 \text{ dB and}$$

$$C = 0.135 \times L \text{ tonnes}/NM^2 \text{ and mm}/NM$$

when the backscattering cross-section per unit weight is assumed to be inversely proportional to fish length.

DISCUSSION

Since the behaviour of the cod was not favourable for the measurements, the results will not be discussed until further experiments have been performed.

In the herring experiment the two integrator channels gave different results. However, we assume that channel B, which integrated an interval in the middle of the cage, is more accurate. This channel was less influenced by the cage and the integrated herring was swimming freely and no dying or dead herring on the bottom or at the roof of the cage was included. Consequently, we use the channel B values in the discussion and for further calculations.

Edwards (1980) reports that the target strength per kg of herring in the size group 21-25 cm is -31.5 dB. Our results differ a great deal from Edwards. The result could also be compared with the -34 dB commonly used in estimating herring abundance. It is not likely, that the difference in frequency (120 and 38 kHz) could explain the large discrepancy.

Nakken and Olsen (1977) have shown that small changes in the tilt angle cause large changes in the target strength. One possible explanation could therefore be the mean tilt angle differ in the two experiments. Our experiment was carried out in a comparatively short time period and if the herring had not time to acclimatize, another tilt angle could be established. On the other hand neither of the results could claim that they represent the "normal" situation along acoustic survey. As Olsen (1979) has pointed out herring react to ship passage by diving and the tilt angle could be quite different from that in a cage after acclimatization.

Unfortunately too little behaviour observations were made during the experiment. Therefore we do not know what kind of tilt angle distribution the observed results do represent. In fact we do not even know if the fish was randomly distributed horizontally. Therefore the determined \overline{TS}_{kg} is highly uncertain. However, the resulting C-value seems to be comparable to the C-values assumed at earlier surveys with R/V "Argos". When the determined \overline{TS}_{kg} is used to calculate C-values corresponding to earlier calibrations the results are

	Factor $\left(\frac{C}{C_{1980}} \right)$	C-value
1979-11-29	6.87 = 8.37 dB	20.9
1976-04-27	2.29 = 3.60 dB	7.0

There is 4.77 dB difference in the (SL + VR) between the calibrations in 1979 and 1976. To make a rough estimate of the C-values at earlier surveys, one can assume that the (SL + VR) has decreased with 0.111 dB/month during the 43 months between the two calibrations. The assumption will give the following values of (SL + VR) and recalculated values of C if the results of the present experiments on herring are used.

	Months from calibr. 1976	(SL + VR)	Δ (SL + VR) ref. 1980-09-05	C-value	
June	1976	2	113.48	3.82	7.3
Sept	1976	5	113.14	4.16	7.9
Febr	1977	10	112.59	4.71	8.9
April	1978	24	111.04	6.26	12.8
Sept	1979	41	109.15	8.15	19.8
Aug	1980	52	107.93	9.37	26.3

In Hagström et al. 1979 and Anon. 1980 a C-value of 15 tonnes/NM² and mm/NM was used. According to the above assumptions this value might have been reasonable in the summer or autumn 1978 but rather low in September 1979 and August 1980.

An important problem in Swedish waters is the divergence between the actual hydrographic conditions and the built in compensation for sound absorption (κ) and velocity (c) in the Simrad TVG amplifier. Simrad compensates for $\kappa = 0.045$ dB/m and $c = 1500$ m/s. The difference could, according to equation (2) be expressed as

$$H = 2R(\kappa - \kappa_a) - 10 \lg \frac{C \times T}{2} - 10 \lg \frac{C_a \times T}{2} \quad (3)$$

where

H = Difference in dB between Simrad compensation and actual conditions

R = Distance between transducer and target (m)

κ = Simrad compensation for sound absorption (dB/m)

κ_a = Actual sound absorption in water (dB/m)

C = Simrad compensation for sound velocity (m/s)

C_a = Actual sound velocity in the water (m/s)

T = Pulse length (s)

If we assume that in Skagerrak and Kattegat

$\kappa_a = 0.032$ dB/m and $C_a = 1487$ m/s (salinity 30 ‰, temperature 10°C)

and in the Baltic

$\kappa_a = 0.013$ and $C_a = 1456$ m/s (salinity 9 ‰, temperature 9°C)

Depth (m)	H (Skagerrak and Kattegat)		H (Baltic)	
	dB	Factor	dB	Factor
20	0.48	1.12	1.15	1.30
40	1.00	1.26	2.43	1.75
60	1.52	1.42	3.71	2.35
80	2.04	1.60	4.99	3.15
100	2.56	1.80	6.27	4.23

The values of κ_a and C_a are taken from Foote (in press) and Fisher & Simmons (1977).

This means that the TVG amplifier overcompensates and that the integrated values are higher than what they should have been when integrating in Swedish waters, especially in the Baltic proper.

The discussion above strongly stresses the need for frequent calibrations and TVG amplifiers adopted to the actual hydrographic conditions.

ACKNOWLEDGEMENT

The authors would like to thank the crew of R/V "Argos" and the diver Jan-Otto Pettersson for their contribution to the experiments.

SUMMARY

This paper presents measurements of the target strength per kilogram of live caged herring and cod. It describes the experimental method employed and measurements of a table tennis ball as a reference target. The target strength per kilogram for herring with a mean length of 23.7 cm was found to be -38.3 dB. The result is compared with other TS-values reported and the differences are discussed.

The divergence between actual hydrographic conditions in Swedish waters and the built in compensation for sound absorption and velocity in the Time Variated Gain Amplifier is reported. The need for frequent calibrations and adopted TVG amplifiers is stressed.

REFERENCES

- Anon., 1980. Final report on the acoustic survey in Skagerrak-Kattegat 3-14 September 1979. - ICES C.M. 1980/H:54, 23 pp, tab. + figs.
- Edwards, J.I., 1975. A preliminary analysis of the variation in target strength of multiple fish targets at various depths. Proceedings of the specialist meeting on acoustic surveying of fish populations. - Inst. of Acoustics 17 December 1975 mimeo.
- Edwards, J.I., 1980. A preliminary investigation of the target strength of herring. - ICES C.M. 1980/B:19, 9 pp, 1 tab., 8 figs.
- Fisher, F.H. and V.P. Simmons, 1977. Sound absorption in sea water. J. Acoustic Soc. Am., 62: 558-564.
- Foote, K.G. (in press). Absorption term in time-varied-gain functions.
- Goddard, G.C. and V.G. Welsby, 1977. Statistical measurements of the acoustic target strength of live fish. - Rapp. P.-v. Reun. Cons. Int. Explor. Mer 170: 170-183.
- Hagström, O., O. Billgren, N. Håkansson och S. Kollberg, 1979. Akustisk uppskattning av sill och skarpsill i östra Skagerrak och Kattegatt 1976-1978. - Medd. från havsfiskelaboratoriet nr 249, 24 pp., 8 tab. 21 figs.
- Håkansson, N., S. Kollberg, U. Falk, E. Goetze and O. Rechlin, 1979. A hydroacoustic and trawl survey of herring and sprat stocks of the Baltic proper in October 1978. - Fischerei-Forschung, Rostock 17 (2) 23 pp.
- Johannesson, K.A. and G.F. Losse, 1977. Some results of abundance estimations obtained in several UNDP/FAO resources survey projects. - Rapp. P.-v. Reun. Cons. Int. Explor. Mer 170: 296-318.
- Olsen, K., 1979. Observed avoidance behaviour in herring in relation to passage of an echo survey vessel. - ICES C.M. 1979/B:18, 10 pp, 10 figs.
- Nakken, O. and A. Olsen, 1977. Target strength measurements of fish. - Rapp. P.-v. Reun. Cons. Int. Explor. Mer 170: 52-64.

Table 1. Calibration data

Date of calibration	SL		VR		SL + VR (dB)	
	dB// 1 μ bar 1/1 eff.	ref. (m) 1/10 eff.	dB// 1 volt per μ bar 1/1 eff.		1/1 eff.	1/10 eff.
1976-04-27	116.9	107.7	-3.2		113.7	104.5
1979-11-29	116.7	107.1	-7.77		108.93	99.33
1980-09-05	122	113	-4.7		117.3	108.3

Table 2. Settings of equipment during fish experiments and empty cage measurements

Echosounder Simrad EK 120 S		
Output power	1/10	
Band width and pulse length	3 kHz, 0.6 ms	
TVG and gain	20 lgR + 0dB	
Discriminator	0	
Recorder gain	2	
Echo integrator QM MK II	Channel A	Channel B
Gain	0dB	0dB
Display setting	10	10
Threshold	0	0
Interval (cod experiment)	4-8 m	4-8 m
Interval (herring experiment)	4-8 m	5-6 m
Bottom stop	off	off

A speed of 12 knots was set on the ships log

Table 3. Calibrations with table tennis ball and settings of the equipment

$$\overline{TS}_{\text{ref}} = -42 \text{ dB}$$

R/V "Argos" Sept. 16 1980

{ Sounder: EK 120 S
Transducer: ITC 120 kHz, 10 cm diameter

Distance transducer - table tennis ball:

$$R = 5.7 \text{ m}, 20 \log R = 15.1 \text{ dB}$$

Variations in U_p less than 10 % from ping to ping

	1/1 Power				1/10 Power	
	20 log R		40 log R		20 log R	40 log R
	0dB	-20 dB	0dB	-20 dB	0dB	0dB
U_p (cal. output)	5.0 V	0.44 V	0.34 V	0.0335 V	1.9 B	0.13 V
SL + VR	<u>117.1</u>	117.0	<u>118.6</u>	119.5	<u>108.7</u>	110.3

Integral per N. Mile = 53 mm at 0dB x 10, threshold 0

1/1 Power, 20 log R 0dB, 12 knots

Sounding = 10.5 mm

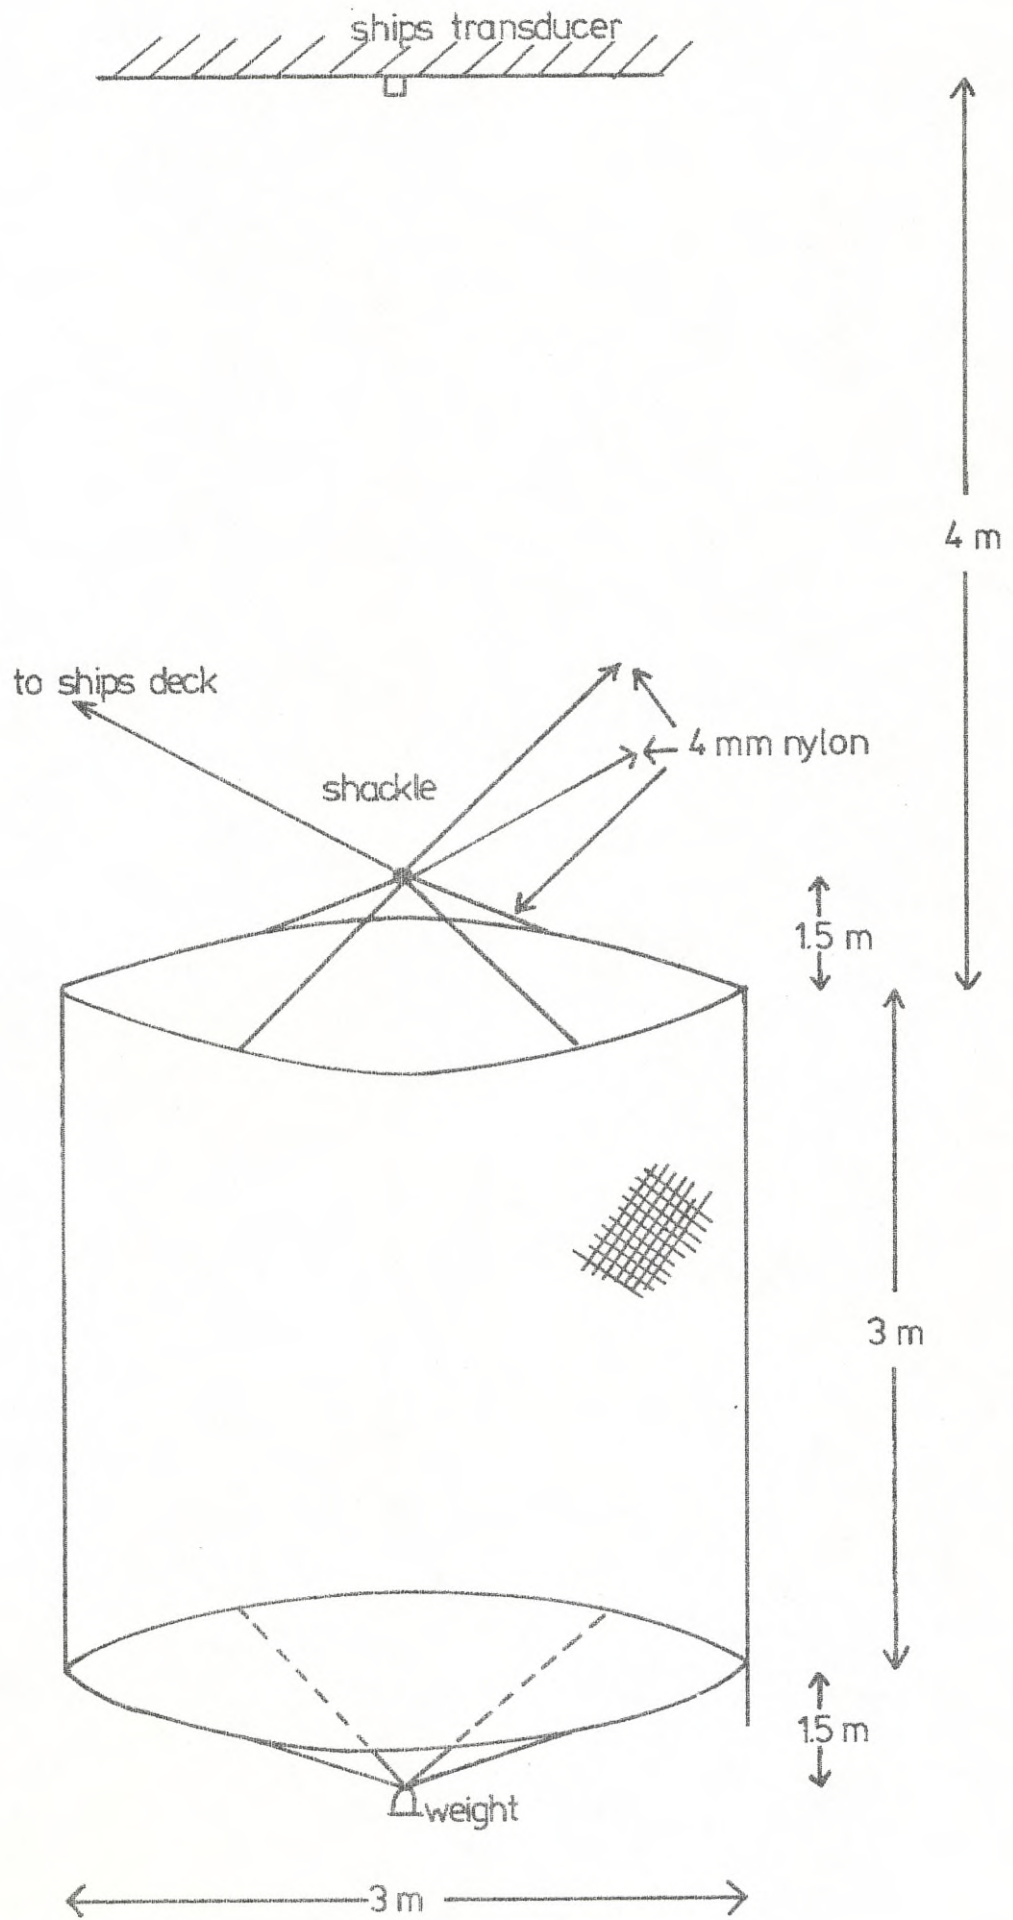


Fig. 1. Experimental cage.

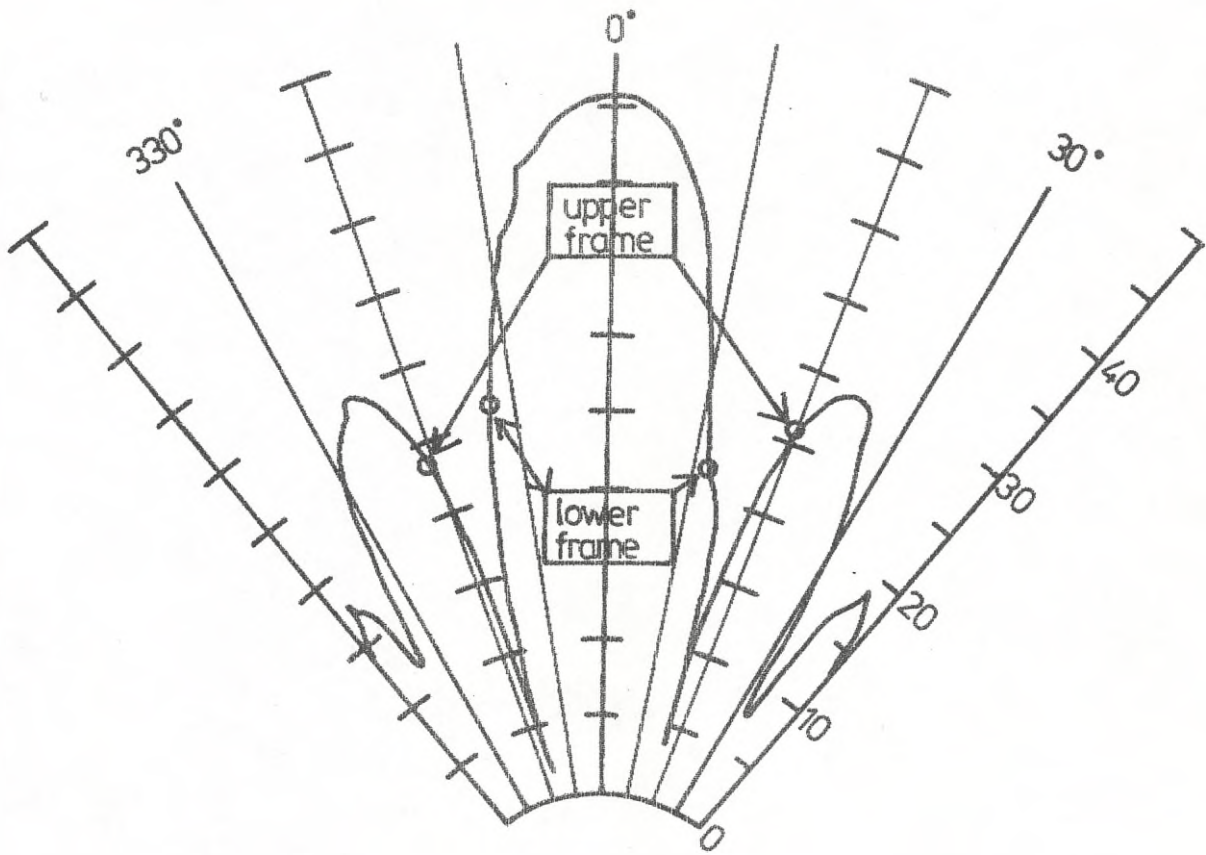


Fig. 2. Position of experimental cage in relation to the transducers directivity pattern

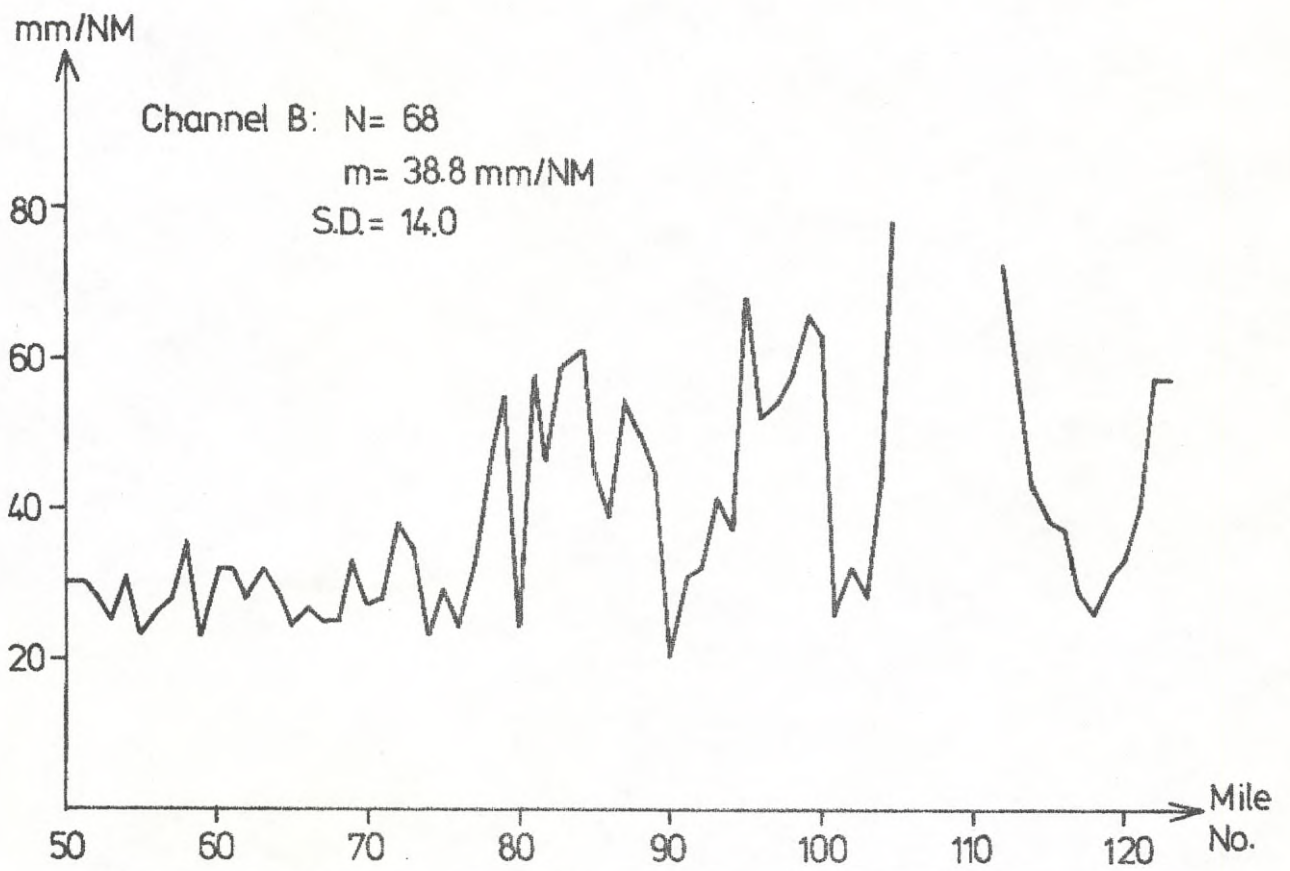
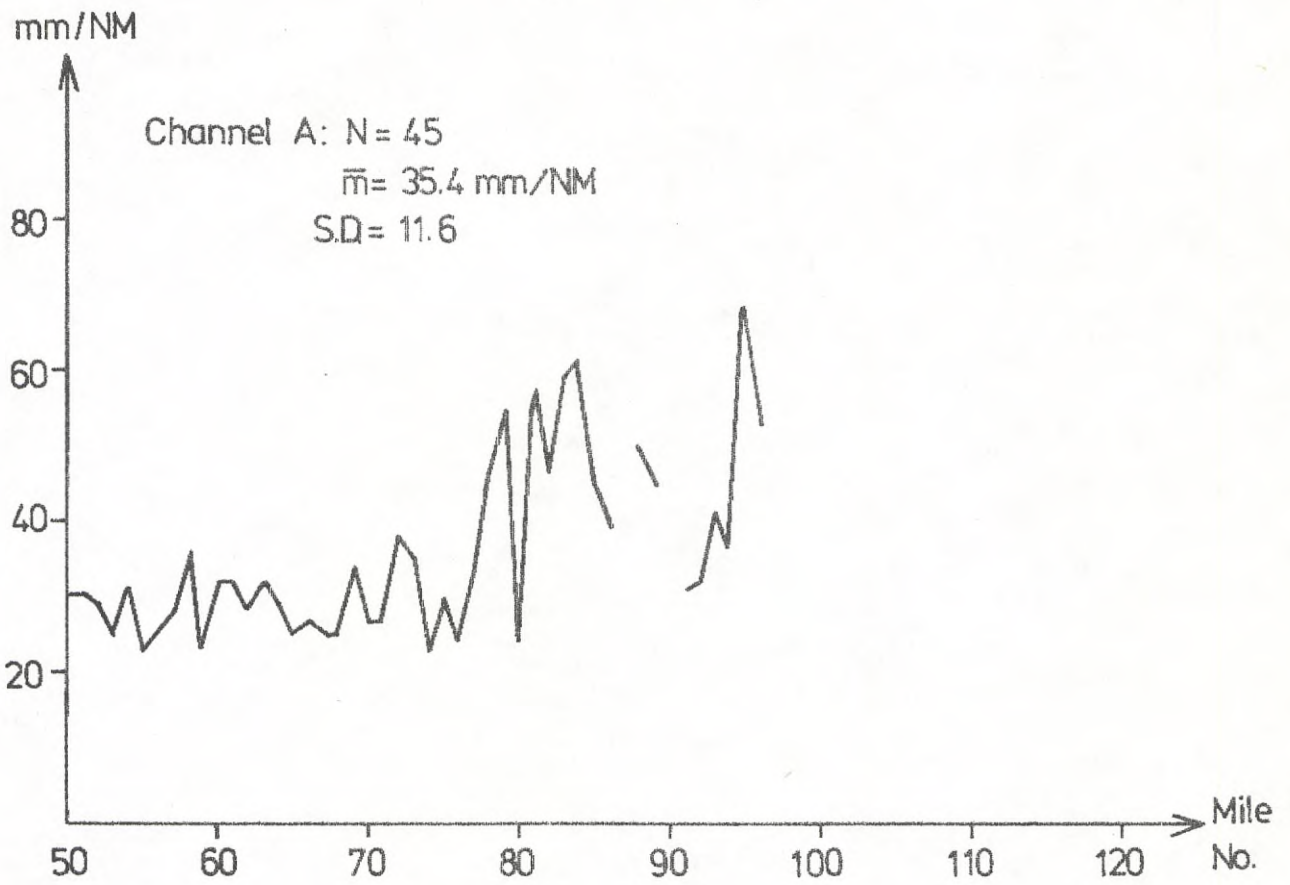


Fig. 3. Plot of integrator deflection during experiment No. 2 on cod.

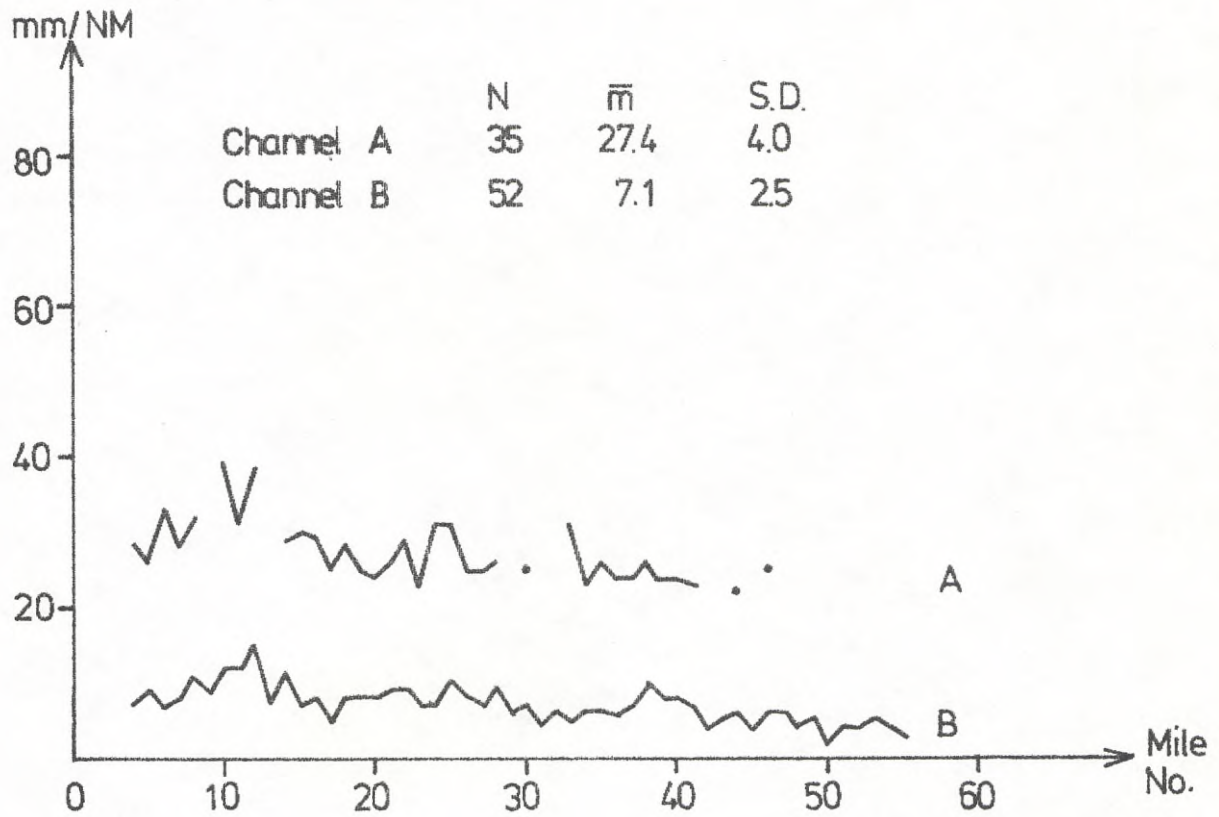


Fig. 4. Plot of integrator deflection during experiment No. 3 on herring.

